Amendments to the Drawings:

The attached sheets of drawings include changes to Figs. 1-4. The sheets replace the original sheets including Figs. 1-4. In Figs. 1 and 2, elements 105, 110, 205, and 210 have been depicted without shading to increase clarity as indicated by the Examiner. In Figs. 1-4, the view numbers and labels have been amended to "FIG." as requested by the Examiner.
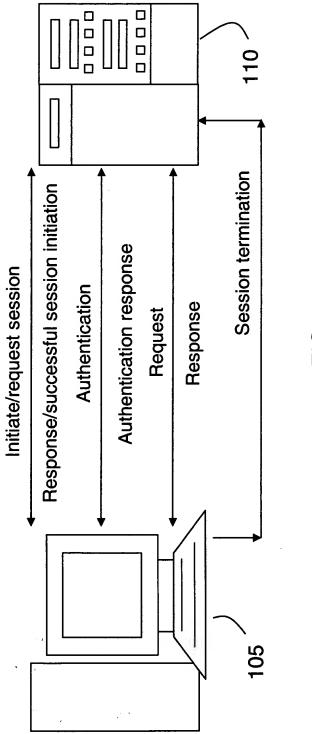
Attachment: Replacement Sheets (Figs. 1-4)
                     Annotated Sheets showing changes
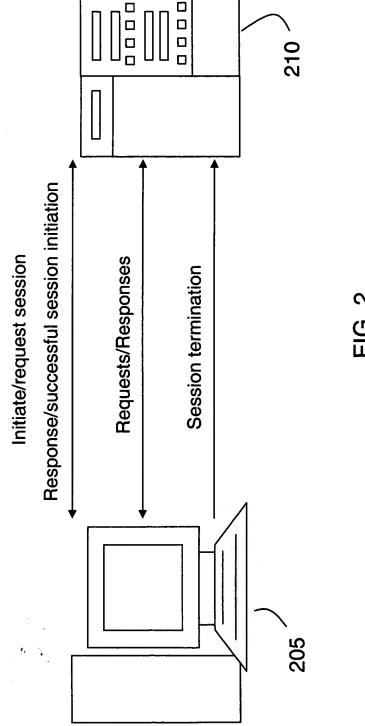
Initiate/request session

Response/successful session initiation

Authentication

Authentication response

Request

Response

Session termination

110

105

FIG. 1

Initiate/request session

Response/successful session initiation

Requests/Responses

Session termination

210

205

FIG. 2

Requests that reference objects:

`<search>`	retrieve the attribute values for a set of objects that satisfy a filter
`<retrieve>`	retrieve the attribute values for a specified resultset
`<delete>`	delete the objects that satisfy a filter
`<modify>`	change the attribute values for the objects that satisfy a filter
`<count>`	count the number of the objects that satisfy a filter
`<create>`	create a new object (in one substore) and expose it to the rest of the stores
`<expose>`	expose an already created object to the rest of the stores

Administrative requests:

`<auth>`	client turn in an authentication sequence
`<list/>`	list server data of various kinds
`<help/>`	return usage information

FIG. 3

General Error Response:

`<error-response>`   return an error from the corresponding request

Responses to requests that reference objects:

`<search-response>`   return a resultset containing the attributes

`<retrieve-response>` return a resultest containing the attributes

`<delete-response>`   return a resultset with the deleted object ids

`<modify-response>`   return a resultset for the modified objects

`<count-response/>`   return the number of objects that satisfied the filter

`<create-response>`   return a resultset with the new object

`<expose-response>`   return a resultset with the exposed objects

Administrative request responses:

`<auth-response>`   server response in an authentication protocol

`<list-response>`   server data that was requested

`<help-response>`   usage information

FIG. 4